




Benefits

- Cost effective alternative to a traditional lift
- Ideal for sites with poor access for installation
- Shaft can be designed to blend into the surrounding structures for applications where presentation is important
- Minimal pit & overrun requirements
- Low maintenance costs
- Self diagnostic programmable logic control (PLC)

Options

- Walls and roof on platform – load protected during use
- Roller shutters or gates on platform – load fully enclosed during use
- Platform finishes - industrial enamel, 2 pack epoxy, stainless steel, aluminium chequer plate, industrial grade vinyl.
- Doors – aluminium with viewing panel, steel, stainless steel, fire rated roller shutters, continuous rated door motors, swing doors fire rated swing doors
- Doors same sides, opposite sides or 90 degrees
- Additional doors for double entry/exit of hoist
- 2 level, 3 level or 4 level
- Fabricated steel ramp when pit is not possible
- 12 metres per minute lift speed
- Twin mast self supporting units where no shaft structure is available
- Custom configurations & capacities available on request

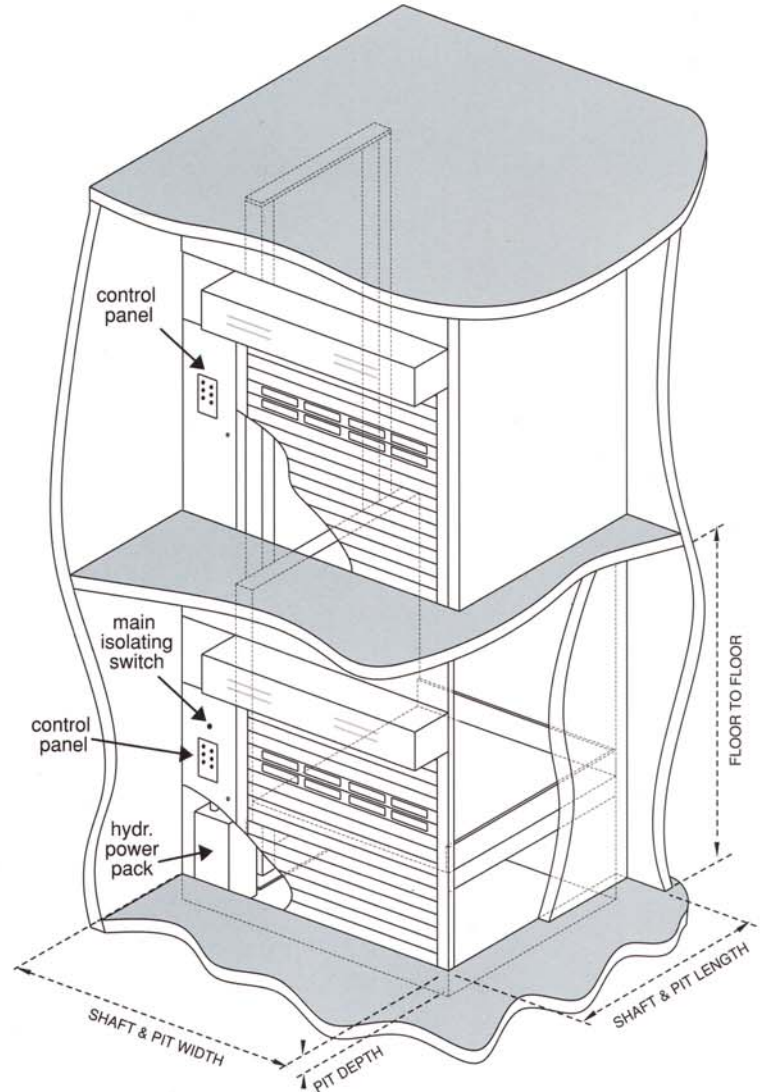

All Southwell hoists exceed the design and safety standard requirements of the Australian Standards and all OH&S regulations

IN SHAFT GOODS HOIST

MODEL	SGH-0909	SGH-1515	SGH-2018	SGH-2418	SGH-2424	SGH-3024
Platform (l x w)	0.9m x 0.9m	1.5m x 1.5m	2.0m x 1.8m	2.4m x 1.8m	2.4m x 2.4m	3.0m x 2.4m
Capacity	350kg	1500kg	1000kg	1000kg	1500kg	2000kg
Shaft Length	970mm	1540mm	2040mm	2440mm	2440mm	3040mm
Shaft Width	1400mm	2000mm	2300mm	2300mm	3000mm	3000mm
Pit Depth	90mm	125mm	125mm	125mm	195mm	195mm

WARRANTY 3 years full warranty and 10 year structural warranty (subject to service agreement with Southwell Lifts & Hoists)